

Filter Regulator for High Pressure (SAW)

SAW200H~600H Series

- Highly durable materials are used in the manufacturing of air regulators intended for high pressure operation.



SAW200H



SAW300H



SAW400H



SAW600H

How to order

SAW 4 00 H - 04 BG

① Filter Regulator

② Body Size

2 - 1/4
3 - 3/8
4 - 1/2
6 - 1

③ for high pressure

④ Thread type

Nil - Rc(PT)
N - NPT
G - G(PF)


⑤ Port Size

Symbol	Size	Body size			
		2	3	4	6
01	1/8	●			
02	1/4	●	●		
03	3/8		●		
04	1/2			●	
06	3/4			●	●
10	1				●

⑥ Accessory(Optional)

Nil - None Bracket / None Gauge(Adapter Only)
B - Bracket
G - Gauge(Round type)

Symbol



Specification

Fluid	Compressed Air			
Max. supply pressure	30bar (3MPa)			
Max. operating pressure	20bar (2MPa)			
Ambient and Media temp.	-5 ~ 60℃ (No freezing)			
Regulating range	1~17bar (0.1~1.7MPa)			
Gauge port	SAR200H	SAR300H	SAR400H	SAR600H
	1/8		1/4	
Construction	Relief type			

Precautions


- Set the outlet pressure range for the regulator in a range that is 85% or less of the inlet pressure. If set above 85%, the inlet pressure will be easily effected by fluctuations in the flow rate and inlet pressure, and will become unstable.
- To set the pressure using the knob, turn the knob in the direction that increases pressure and lock the knob after the pressure is set. If this is done in the direction that decreases pressure, the pressure may drop from the original set pressure. Turning the knob clockwise increases the outlet pressure, and turning it counterclockwise reduces the pressure.
- Please contact SKP when a circuit requires the use of a regulator having relief sensitivity with high precision and setting accuracy.
- Residual pressure release (outlet pressure release) is not complete by releasing the inlet pressure. To release residual pressure, select a model with a back flow mechanism.

Filter Regulator for High Pressure


DIMENSIONS (mm)



SAW 200H

■ SAW200H-□02□□

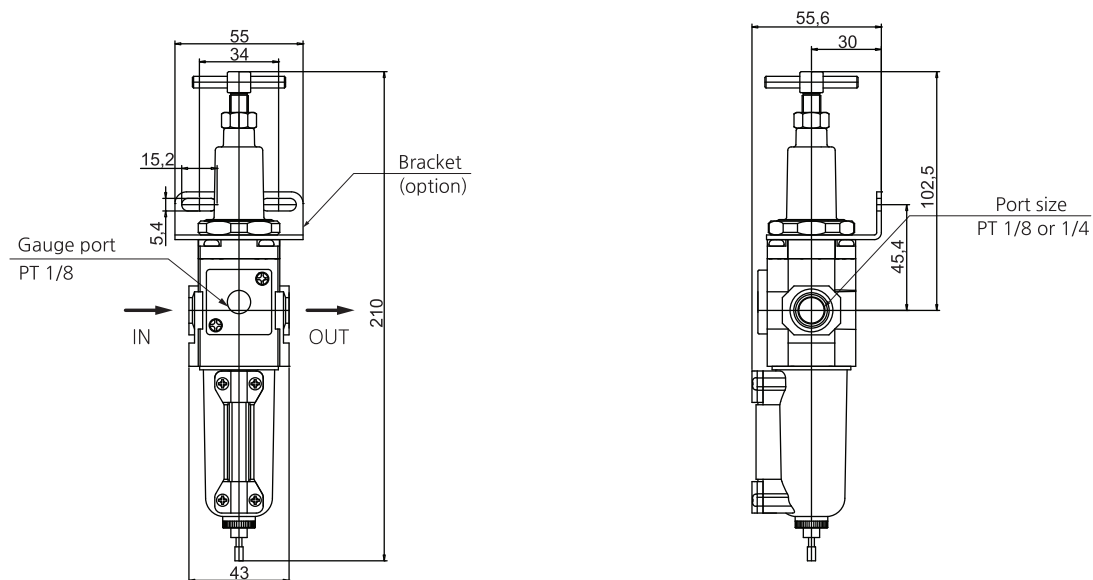

■ Dimensions of each model with an option attached

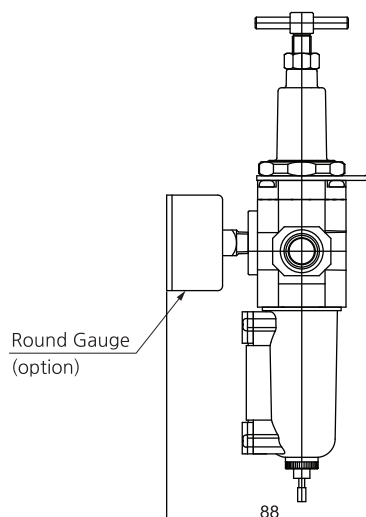

Option	G : Round type Gauge	B : Bracket
Model	 Gh40, R1/8	 B220

SAU

SAU
LARGE FLOW

SAU
HIGH PRESS.

SAW

SAW
HIGH PRESS

SAWM
SAWD

SAF

SAF
LARGE FLOW

SAFM
SAFD

SAR

SAR
LARGE FLOW

SAR
T-HANDLE

SAR
HIGH PRESS.

SRP

SAL

SAL
LARGE FLOW

AUTO-DRAIN
KITS

SHVS

SPS100

ACCESSORY


CAUTION



Series SAW200H~600H

DIMENSIONS (mm)

SAW 300H~400H

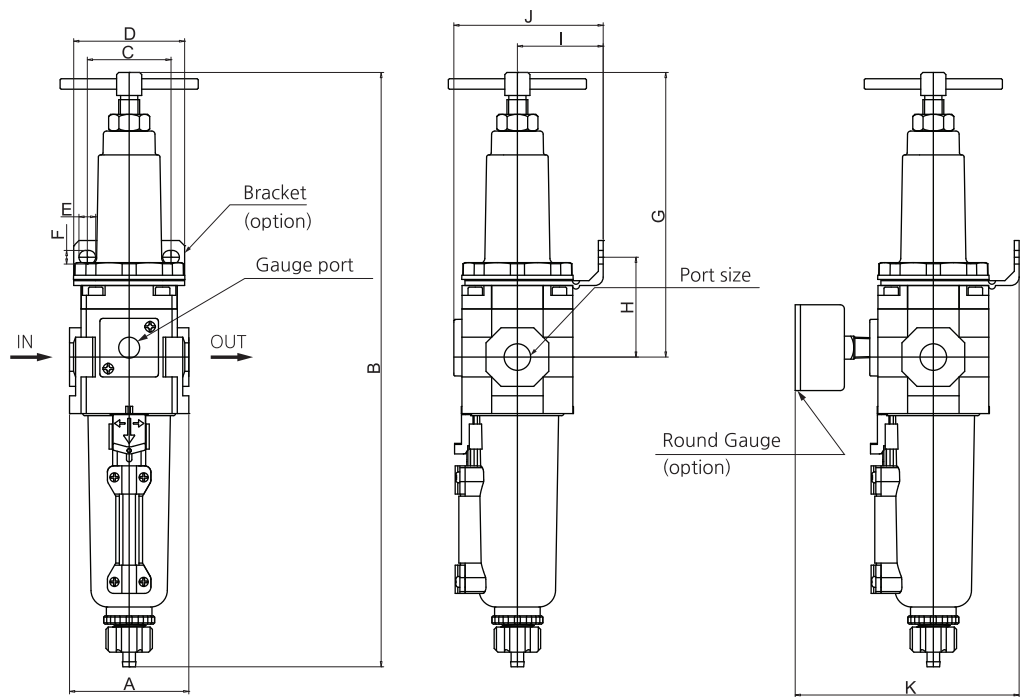- SAW300H□-□03□□
- SAW400H□-□04(06)□□



Option	G : Round type Gauge	B : Bracket
Model	<div> SAW300H : Gh40, R1/8 SAW400H : Gh50, R1/4</div>	<div> SAW300H : B320 SAW400H : B420</div>


Model	Port size	A	B	C	D	E	F	G	H	I	J	K
SAW300H-03	1/4, 3/8	57	284	40	53	8	6.5	136	47.7	41	71.4	107
SAW400H-04	1/2	75.2	314	54	70	10.5	8.5	155	52.9	50	86.7	122

Filter Regulator for High Pressure


DIMENSIONS (mm)



SAW 600H

- SAW600H□-□06□□
- SAW600H□-□10□□

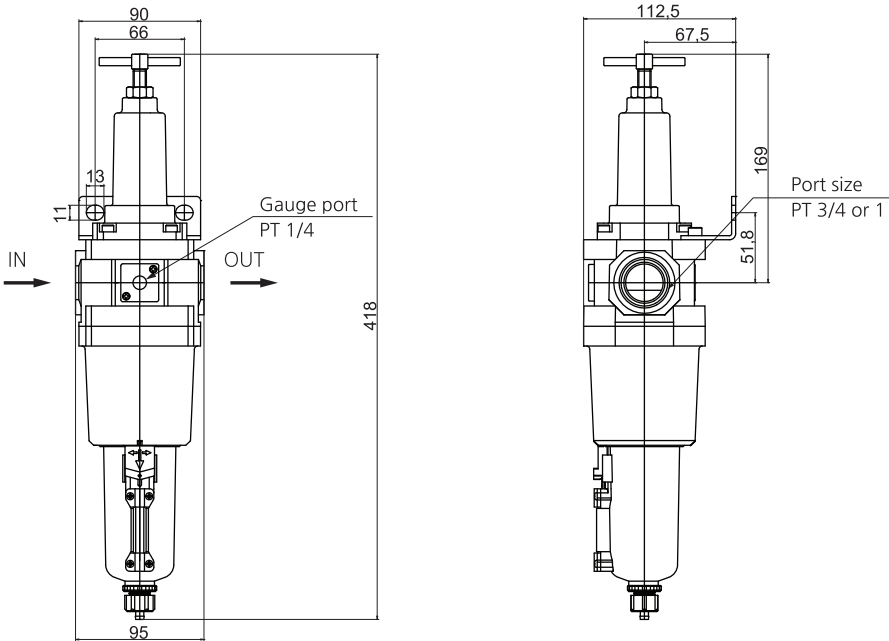

- Dimensions of each model with an option attached

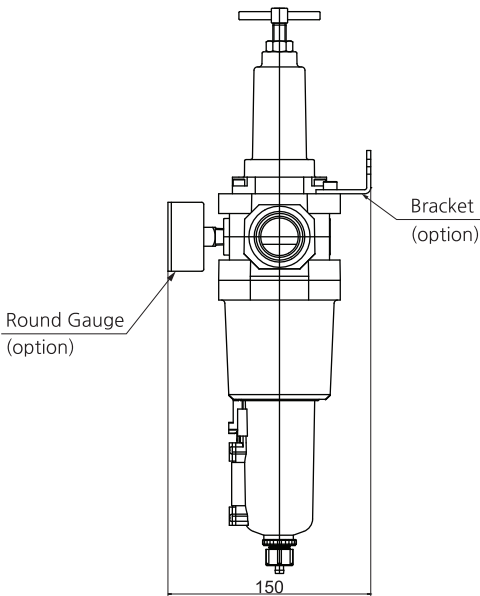

Option	G : Round type Gauge	B : Bracket
Model	 Gh50, R1/4	 B600

SAU

SAU
LARGE FLOW

SAU
HIGH PRESS.

SAW

SAW
HIGH PRESS

SAWM
SAWD

SAF

SAF
LARGE FLOW

SAFM
SAFD

SAR

SAR
LARGE FLOW

SAR
T-HANDLE

SAR
HIGH PRESS.

SRP

SAL

SAL
LARGE FLOW

AUTO-DRAIN
KITS

SHVS

SPS100

ACCESSORY

CAUTION